


# WATERPACK

## CABLE

- 1.5mm<sup>2</sup> 4 core submersible insulated cable.
- SABS approved.

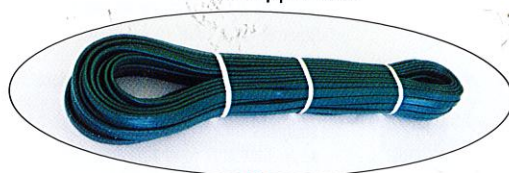

## CONTROL BOX

- Pump protection and control for direct start up.
- Thermal protection with external manual reset.



## MALE ADAPTORS

- Mechanical compression fittings are designed to withstand working pressures of up to 16bar.


## CABLE JOINT

- MX1 epoxy cable joint kit.




## BASEPLATE

- 40mm base-plate with integrated cable gland.

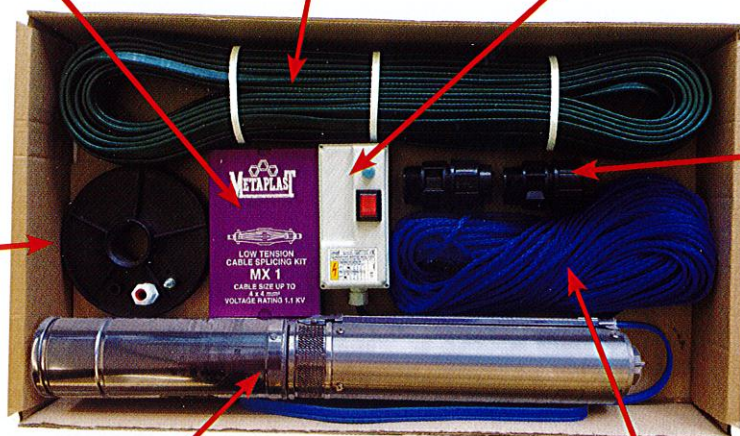

## WET-END

- Base and upper support made from precision-cast stainless steel with build in non-return valve.

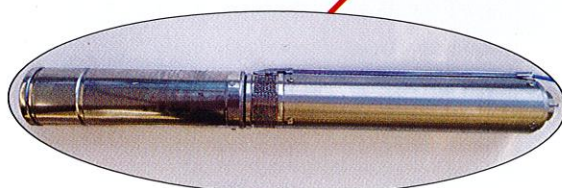

## MOTOR

- Tesla 4OL submersible motor made in AISI 304 stainless steel for parts in contact with water.
- Complete with removable lead out cable.



## NYLON ROPE

- 6mm nylon safety rope.

WATERPACK	230 V	WET END	CABLE LENGTH	Q = DELIVERY									
				l/min 0	5	10	15	20	25	30	40	50	
				m³/h 0	0.3	0.6	0.9	1.2	1.5	1.8	2.4	3	
				H = TOTAL HEAD METERS COLUMN OF WATER									
DAB 1	0.37kW	S4-1/13	50m	83	78	69	57	42	21				
DAB 2	0.37kW	S4-2/7	50m	47				42	40	36	29	19	
DAB 3	0.56kW	S4-2/10	70m	67				60	56	52	41	27	
DAB 4	0.75kW	S4-2/14	70m	93				83	79	73	57	37	