


CM2 Series

Twin Impeller Centrifugal Pumps

Performance Chart

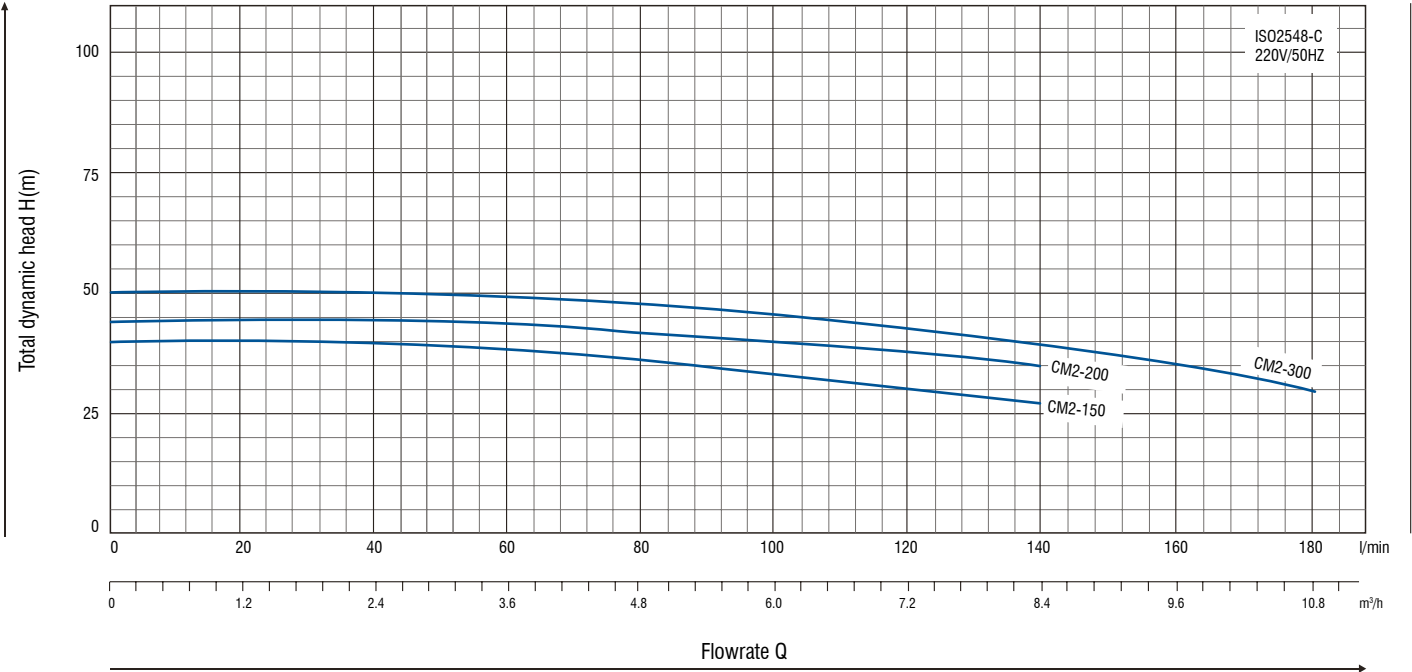

Performance Table

Type	Power		μF	Ampere I max.	Q (l/min) (m³/h)	0	20	40	60	80	90	100	110	120	140	160	200	DNA	DNM
	HP	kW				0	1.2	2.4	3.6	4.8	5.4	6	6.6	7.2	8.4	9.6	12		
CM2-150	2	1.5	30	8	Head (m)	39.5	38	36.5	34	32	30	28.5	27	26	24.5	-	-	1½"	1¼"
CM2-200	3	2.2	45	10		43	42.5	42	41	40	39	38.5	36.5	34.5	32	-	-	1½"	1¼"
CM2-300	4	3	60	12		49	48.7	48.5	47.5	47	46	45	44	43.5	40	36.5	25	1½"	1¼"

Operating Limits

- Maximum operating pressure: 8 bar
- Maximum ambient temperature +40°C
- Liquid temperature up to +60°C
- Maximum altitude +1000m

Production Standard

- IEC 60034-1
- IEC 335-1
- IEC 34-1
- ISO 2548

Motor

- Single phase power supply with capacitor permanently activated
- Insulation class: B
- Protection: IP44
- Speed of rotation: 2850rpm
- Continuous duty: S1

